




# EUROCHAIN VX



Electric chain hoist  
for load from 63 to 10,000 kg

 **VERLINDE**<sup>TM</sup>  
LIFTING EQUIPMENT

VERLINDE's Chain hoist historical family: **latest generation of Verlinde technology !**

**New electric chain hoist**  
**EUROCHAIN**  
**VX**



1858  
Premier Palan



1950  
PEC



1974  
Eurochain 2



1989  
Eurochain VE



1997  
Eurochain VL



2011  
Eurochain VR



THE NEXT STEP  
CHAIN HOIST

**2019**

Here comes the new VERLINDE electric chain hoist for load from 63 to 10,000 kg. After two years designing the next level of chain hoist technology and production, we are ready to present our new series in the light lifting version.

# EUROCHAIN VX

## Electric chain hoist for load from 63 to 10,000 kg

- 1 Modernized outlook**
- Novelty, hoist dimensions reduced, better hook approach.

- 2 Optimized chain collector boxes**
- Robustness, safety.

- 3 Long-life brake disc**
- Improved reliability and safety, no adjustments required, low maintenance.
  - Proven technology.



- 4 Long-life limit switch**
- Safety, hook positioning, monitoring, proven technology.

- 5 New bracket suspension**
- Easy installation, compatibility with existing trolleys.
  - Improved hook path due to reduced C-dimension.

- 6 Sturdy hoisting motor**
- Reliability due to in-house development.
  - Meets and exceeds market's requirement.
  - Improved airflow for better cooling of the motor.
  - Optimized utilization time.
  - Enhance safety due to overheating preventive sensors.

- 7 More power with optimized gear parts and more safety thanks to the new clutch design**
- Improved serviceability, wide range of ratios to fit better customer applications to maximize productivity, more precise and durable clutch setting, easiness of clutch adjustment, protects people, hoist, crane and building structure from overloads.
  - Proven technology.

# EUROCHAIN VX


## Electric chain hoist for load from 63 to 10,000 kg

### EUROCHAIN VX hoist range

Load (kg)	Hoist type	Group (ISO)	Lifting speed (m/min)	Reeving	Chain size
63	VX2 0608b3	M6	8/2	1	4.1 x 12.1
	VX2 0612b3	M6	12/3	1	4.1 x 12.1
	VX2 0616b3	M6	16/4	1	4.1 x 12.1
	VX2 0624b3	M6	24/6	1	4.1 x 12.1
125	VX2 1208b3	M6	8/2	1	4.1 x 12.1
	VX2 1212b3	M6	12/3	1	4.1 x 12.1
	VX2 1216b2	M5	16/4	1	4.1 x 12.1
160	VX2 1608b3	M6	8/2	1	4.1 x 12.1
	VX2 1612b3	M6	12/3	1	4.1 x 12.1
	VX5 1616b1	M4	16/4	1	5.1 x 15.1
250	VX2 2508b2	M5	8/2	1	4.1 x 12.1
	VX5 2512b1	M4	12/3	1	5.1 x 15.1
	VX5 2504b3	M6	4/1	1	5.1 x 15.1
	VX5 2508b3	M6	8/2	1	5.1 x 15.1
	VX5 2516b2	M5	16/4	1	5.1 x 15.1
320	VX5 3208b2	M5	8/2	1	5.1 x 15.1
	VX2 5004b2	M5	4 / 1	2	4,1 x 12,1
500	VX5 5004b2	M5	4 / 1	1	5,1 x 15,1
	VX5 5008b2	M5	8 / 2	1	5,1 x 15,1
	VX10 5012b2*	M5	12 / 3	1	7,2 x 21,1
	VX10 5004b2*	M5	4 / 1	1	7,2 x 21,1
	VX10 5008b3*	M6	8 / 2	1	7,2 x 21,1
	VX10 5016b2*	M5	16 / 4	1	7,2 x 21,1
630	VX5 6304b2	M5	4/1	2	5.1 x 15.1
	VX10 6316b1*	M4	16/4	1	7.2 x 21.1
1000	VX5 1004b2	M5	4/1	2	5.1 x 15.1
	VX10 1004b2*	M5	4/1	1	7.2 x 21.1
	VX10 1006b2*	M5	6/1,5	1	7.2 x 21.1
	VX10 1008b2*	M5	8/2	1	7.2 x 21.1
1250	VX10 1204b1*	M4	4/1	1	7.2 x 21.1
	VX10 1208b1*	M4	8/2	1	7.2 x 21.1
	VX10 1204b2*	M5	4/1	2	7.2 x 21.1
1600	VX10 1204b2*	M5	6/1,5	2	7.2 x 21.1
	VX10 1604b2*	M5	4/1	2	7.2 x 21.1
2000	VX10 1606b2*	M5	6/1,5	2	7.2 x 21.1
	VX10 2004b2*	M5	4/1	2	7.2 x 21.1
2500	VX10 2006b1*	M4	6/1,5	2	7.2 x 21.1
	VX10 2504b1*	M4	4/1	2	7.2 x 21.1

From 2,500 to 10,000 kg consult us

\*EUROCHAIN VX10 will be available second semester 2019.

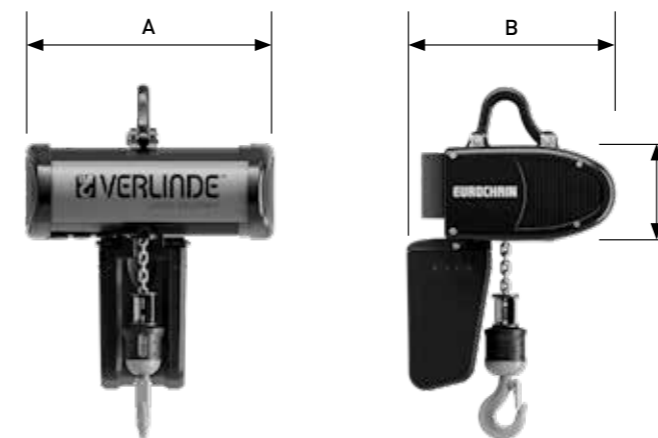

### Hoist dimensions

Hoist type	Dimensions (mm)			Weight w/o chain (kg)
	A	B	C	
EUROCHAIN VX2	387	297.6	141	22.5 (24.1*)
EUROCHAIN VX5	410	345.9	157	30 (35.3*)
EUROCHAIN VX10	na	na	na	na

\*Hoist with counterweigh

### Standard equipments

The electric chain hoist EUROCHAIN VX includes the following equipment as standard:

- Height of lift 3 m.
- Bracket suspension for suspended hoist.
- 2 hoisting speeds.
- Safety limit switch for upper & lower position.
- IP55 hoisting & travelling motor protection.
- Load chain galvanized.
- Control cable 2,5 m.
- 2 buttons pendant for hook suspended hoist or manual trolley.
- 4 buttons pendant for hoist with electric trolley.
- Power supply 400V/3Ph/50Hz or 415V/3Ph 50 Hz or 460V/3Ph /60 Hz.
- Low voltage control 48 V.
- Torque limiter.
- Chain collector.
- Emergency stop button mushroom type.
- Paint 5 years guaranteed (RAL 7021).
- Variable travelling speed (for hoist with electric trolley)
- 2 years guaranteed.

### Available versions

- Fixed hoist suspended by bracket.
- Hoist on monorail push trolley.
- Hoist on monorail motorized trolley.

### Options available

- Non standard power supply (ex. : 230 3ph).
- ACF board for direct control hoist.
- Hard wired control (48V).
- Stainless steel lifting chain and hook.
- Self locking hook.
- Time meter.
- Radio remote control.
- Pendant with 4 or 6 buttons.
- Key switch on pendant.
- Travel limit switches.
- Non standard length on power supply cable.
- Non standard power supply plug (4 or 5 poles).
- Rain cover.
- Brake manual release.
- Food contact oil (NSF H1).
- Gear limit switches 2 or 4 steps.



## VERLINDE is:

- The leading French manufacturer and exporter of lifting and handling equipment.
- A comprehensive range of 30 groups of lifting equipment from 60 to 250,000 kg.
- ISO 9001 Quality control certified and ISO 14001 Environmental Management Systems.

## In France:

A sales network and after sales service points, EUROPONT travelling crane construction plants and a distributor network.

## Abroad:

A customer service in more than 92 countries.

## References

### Metallurgy, Mechanics, Nuclear

ArcelorMittal, Unimetal, Stein, NFM, Framatome, Alstom

### Chemicals, Petrochemicals industry

Sanofi Aventis, Total, Du Pont De Nemours

### Aeronautical industry

Aérospatiale, Airbus, Snecma, Eurocopter, Air France, Aéroport de Paris, Dassault Aviation



### Agri-food industry

Nestlé, Danone, Bel, Palamatic, Tetrapak, Lactalis

### Automobile industry

Renault, Peugeot, Citroën, Scania, Ford, RVI, Volkswagen, Michelin, Massey Ferguson, Manitou, Toyota Industrial Equipment

### Other sectors

EDF, SNCF, RATP, Spie, Degremont, Eiffage, Polysius, Baudin Chateaufort

This document and the information contained herein, is the exclusive property of VERLINDE S.A.S. and represents a non-public, confidential and proprietary trade secret that may not be reproduced, disclosed to third parties, altered or otherwise employed in any manner whatsoever without the express written consent of VERLINDE S.A.S. Copyright © VERLINDE S.A.S. All rights reserved.



NEXT LEVEL  
PARTNERSHIP

2, boulevard de l'Industrie | B.P. 20059 | 28509 Vernouillet cedex | France  
Phone : **(33) 02 37 38 95 95** | Fax : **(33) 02 37 38 95 99** | Internet : [www.verlinde.com](http://www.verlinde.com)

